
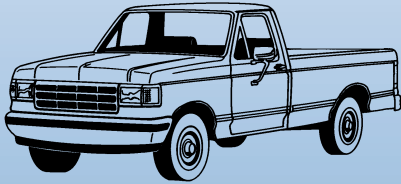


# AUTOMOTIVE BATTERIES

by

# ATLAS®

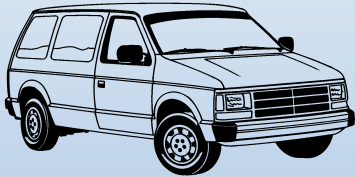

**Height adjuster and handle on dual-terminal batteries allow easier, more flexible installation and easier switching to other vehicles.**

## "Perma-Ful" Economy Line



State-of-the-art engineering and computer-controlled manufacturing techniques combined with more than 250 quality control checks guarantee our batteries deliver more starting power-per-pound than any other battery on the market today.

FEATURES	BENEFITS
<ul style="list-style-type: none"> <li>Delivers most power-per-pound</li> </ul>	<ul style="list-style-type: none"> <li>Guarantees sure starts in the most difficult temperatures.</li> </ul>
<ul style="list-style-type: none"> <li>Forged terminal bushings</li> </ul>	<ul style="list-style-type: none"> <li>Resist acid seepage and corrosion.</li> </ul>
<ul style="list-style-type: none"> <li>Calcium, maintenance-free lead-alloy plates</li> </ul>	<ul style="list-style-type: none"> <li>Eliminate need to add water.</li> </ul>
<ul style="list-style-type: none"> <li>Tight-pack construction</li> </ul>	<ul style="list-style-type: none"> <li>Substantially reduces vibration damage.</li> </ul>
<ul style="list-style-type: none"> <li>Premium, deep-pocket envelope separators</li> </ul>	<ul style="list-style-type: none"> <li>Protect plates and prevent internal shorts for longer life.</li> </ul>
<ul style="list-style-type: none"> <li>More than 250 quality control checks</li> </ul>	<ul style="list-style-type: none"> <li>Ensure longest life and utmost reliability.</li> </ul>
<ul style="list-style-type: none"> <li>Made in U.S.A.</li> </ul>	<ul style="list-style-type: none"> <li>Your assurance of quality.</li> </ul>



DISTRIBUTED BY:

# AUTOMOTIVE BATTERIES

GROUP NO.	PART NO.	ATLAS NO.	FOOT NOTES	PERFORMANCE LEVEL			QTS. OF ACID	APPROXIMATE WEIGHT		MAXIMUM OVERALL DIMENSIONS (in inches and mm)					
				REF. CA @ 32°F	CCA @ 0°F	RESERVE CAPACITY		WET	DRY	L	W	H			
24	PF24/26A	635313	†HIM	560	450	60	—	26	—	8 3/4	222	6 3/4	171	8 *	203 *
24F	PF24F/26RA	635315	†HIM	560	450	60	—	26	—	8 3/4	222	6 3/4	171	8 *	203 *
26/26R/70	PF-PO-26/70	635317	†CHMV	560	450	60	—	27	—	8 3/4	222	6 7/8	175	8 *	203 *
26	PF24/26A	635313	†HIM	560	450	60	—	26	—	8 3/4	222	6 3/4	171	8 *	203 *
26R	PF24F/26RA	635315	†HIM	560	450	60	—	26	—	8 3/4	222	6 3/4	171	8 *	203 *
58	PF-PO-58	635318	†HM	520	430	65	—	27.5	—	10	254	7 1/4	184	7	178
70 (74/70)	PF74/70A	635316	†HIM	665	540	80	—	29.5	—	8 3/4	222	7	178	7 1/8 *	181 *

**SYMBOL DEFINITIONS:**

\* - For height with adapter add 7/8" (22 mm)

† - Maintenance-free calcium alloy grids

~ - Deduct 4% from CCA & CA rating to allow allow for special electrolyte additive

**FOOTNOTES:**

**C** - Centerline terminal posts

**H** - Includes handles or lifting edges

**I** - Includes top adapter

**L** - Anchor lock elements

**M** - Flush manifold vented cover

**N** - Flush manifold vented cover when shipped wet, standard cover when shipped dry or FP

**V** - Dual terminal universal design

Ratings conform to B.C.I. specifications.

Dry = up to 10% reduced capacity.

All batteries manufactured in polypropylene cases except where noted.

Maintenance-free batteries have microporous, polyethylene envelope separators.



800-251-7900