

ATLAS ACCU-TEMP EXTREME Silver Alloy

It's a fact, two conditions kill more batteries every year, very hot & very cold temperatures.


Atlas meets the challenge with it's latest offering:

The "Atlas Accu-Temp Extreme with Silver Alloy"

The battery that outperforms in extreme environments.

PATENTED SILVER (Ag) CALCIUM ALLOY

Provides extended life under hot climate, high underhood temperatures and severe service.

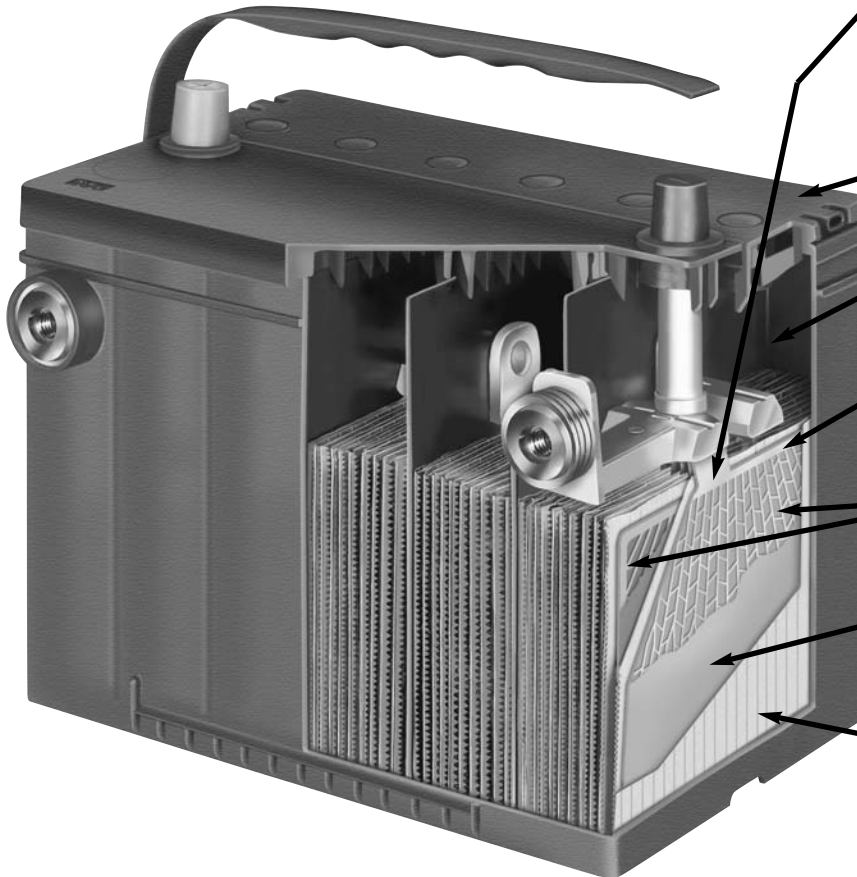

- **250+ QUALITY CONTROL CHECKS**
Ensures long life and reliability.
- **ULTRA-PURE ELECTROLYTE**
Increases maintenance-free performance and retards corrosion.
- **MAINTENANCE-FREE DESIGN**
Delivers maximum starting power. No need to add water.
- **ADDED ELECTROLYTE RESERVOIR**
Retards plate dry out for longer maintenance-free life.
- **SPECIALLY DESIGNED REINFORCED "FULL FRAME GRIDS"**
Retards grid growth and internal shorting for longer life in higher temperatures and extreme conditions.
- **HEAVIER GRID AND PLATE DESIGN**
Provides longest life with twice the wire diameter of typical grids.
- **SPECIAL PLATE PASTE**
Improves reactivity with the electrolyte to provide more power-per-pound and reduces shedding for maximum life.
- **SPECIAL NEGATIVE ENVELOPE SEPARATORS**
Reduces short circuits due to normal plate shedding and growth.
- **MADE IN THE USA**
Your assurance of quality.

GROUP NO.	PART NO.	COLOR CODE COVER/CASE	FOOT NOTES	SUGGESTED WARRANTY	PERFORMANCE LEVEL			APPROXIMATE WEIGHT (lbs.)	MAXIMUM OVERALL DIMENSIONS (in inches and mm)		
					REF. CA @ 32 °F	CCA @ 0 °F	RESERVE CAPACITY		L	W	H
75/86	AXS-75/86	BB	†CHIMV	70 months	820	690	90	35.5	9" (248)	7" (178)	8" (206)
34/78	AXS-34/78	BB	†CHIMV	70 months	940	800	115	41.5	10" (273)	6" (175)	8" (203)*
25	AXS-25	BB	†HM	70 months	750	600	90	35.0	9" (248)	6" (175)	8" (225)
35	AXS-35	BB	†HM	70 months	750	600	90	35.0	9" (248)	6" (175)	8" (225)
58	AXS-58	BB	†HM	70 months	720	580	85	32.0	10" (254)	7" (184)	7" (178)
65	AXS-65	BB	†HM	70 months	885	750	140	45.5	12" (305)	7" (187)	7" (194)
75	AXS-75	BB	†HM	70 months	820	690	90	35.5	9" (248)	7" (178)	7" (184)
78	AXS-78	BB	†HM	70 months	940	800	115	41.5	10" (273)	6" (175)	7" (184)

SYMBOL DEFINITIONS:

* - For height with adapter add 7/8" (22 mm)

† - Maintenance-free silver lead alloy grids

Ratings conform to B.C.I. specifications.

All batteries manufactured in polypropylene cases.

Maintenance-free batteries have microporous, polyethylene envelope separators

FOOTNOTES:

C - Centerline terminal posts

H - Includes handles or lifting ledges

I - Includes top adapter

M - Flush manifold vented cover

P - Includes vent tube adapter kit

V - Dual terminal universal design

COLOR CODE: B - Black

Distributed by:

