
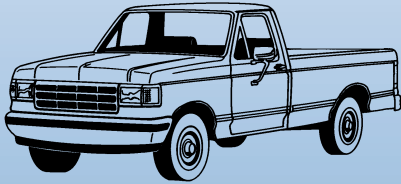


AUTOMOTIVE BATTERIES

by

ATLAS®

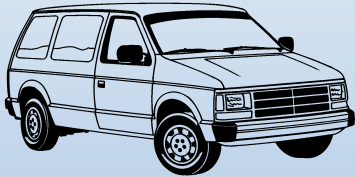

Height adjuster and handle on dual-terminal batteries allow easier, more flexible installation and easier switching to other vehicles.

"Worry Free" Protection Maximized coverage



State-of-the-art engineering and computer-controlled manufacturing techniques combined with more than 250 quality control checks guarantee our batteries deliver more starting power-per-pound than any other battery on the market today.

FEATURES	BENEFITS
<ul style="list-style-type: none"> Delivers most power-per-pound 	<ul style="list-style-type: none"> Guarantees sure starts in the most difficult temperatures.
<ul style="list-style-type: none"> Forged terminal bushings 	<ul style="list-style-type: none"> Resist acid seepage and corrosion.
<ul style="list-style-type: none"> Calcium, maintenance-free lead-alloy plates 	<ul style="list-style-type: none"> Eliminate need to add water.
<ul style="list-style-type: none"> Tight-pack construction 	<ul style="list-style-type: none"> Substantially reduces vibration damage.
<ul style="list-style-type: none"> Premium, deep-pocket envelope separators 	<ul style="list-style-type: none"> Protect plates and prevent internal shorts for longer life.
<ul style="list-style-type: none"> More than 250 quality control checks 	<ul style="list-style-type: none"> Ensure longest life and utmost reliability.
<ul style="list-style-type: none"> Made in U.S.A. 	<ul style="list-style-type: none"> Your assurance of quality.



DISTRIBUTED BY:

AUTOMOTIVE BATTERIES

GROUP NO.	PART NO.	ATLAS NO.	FOOT NOTES	PERFORMANCE LEVEL			QTS. OF ACID	APPROXIMATE WEIGHT		MAXIMUM OVERALL DIMENSIONS (in inches and mm)					
				REF. CA @ 32°F	CCA @ 0°F	RESERVE CAPACITY		WET	DRY	L	W	H			
24	WF24	635011	†HM	650	550	90	6	35.5	—	10 3/4	273	6 3/4	171	9	229
24F	WF24F	635014	†HM	650	550	90	6	35.5	—	10 3/4	273	6 3/4	171	9	229
25	WF25	635002	†HM	675	550	90	—	33.5	—	9 3/4	248	6 7/8	175	8 7/8	225
26/26R/70	WF26/70	635020	†CHMV	665	540	80	—	29.5	—	8 3/4	222	6 7/8	175	8 *	203*
34/24	WF34	635009	†HIM	690	550	90	—	33.5	—	10 3/4	273	6 7/8	175	8 *	203 *
35	WF35	635008	†HM	675	550	90	—	33.5	—	9 3/4	248	6 7/8	175	8 7/8	225
40R	WF40R	635013	†	810	650	105	—	37	—	11	279	6 7/8	175	6 7/8	175
42	WF42	635004	†	590	475	70	—	29	29	9 9/16	242	6 7/8	175	6 7/8	175
45	WF45	635012	†	600	485	67	—	30.5	—	9 3/8	238	5 1/2	140	9	229
47/90	WF47/90	638305	†HM	745	600	90	—	33.5	37.5	9 9/16	242	6 7/8	175	6 7/8	175
48/91	WF48/91	635018	†HM	875	700	100	4.5	36.5	24.5	11	278	6 7/8	175	6 7/8	175
50	WF50	635007	†HM	750	600	108	—	43	—	13 3/8	340	53/8	136	10	254
51	WF51	635001	†M	590	475	70	—	28	—	9 3/8	238	5	127	8 3/4	222
51R	WF51R	635000	†M	590	475	70	—	28	—	9 3/8	238	5	127	8 3/4	222
55	WF55/62A	635003	†HI	600	500	75	—	29.5	—	8 3/4	222	6	152	8 1/2	216
58	WF58	635005	†HM	630	500	75	—	29	—	10	254	7 1/4	184	6 7/8	175
65	WF65	635133	†HM	890	675	130	—	41	—	12	305	7 3/8	187	7 5/8	194
75	WF75	635006	†HM	710	570	85	—	32	—	9 3/4	248	7	178	7 1/4	194
75/86	WF75/86	635134	†CHMV	800	650	90	—	33	—	9 3/4	248	7	178	8 1/8 *	206 *
78	WF78	635135	†M	820	690	110	—	36.5	—	10 3/4	273	6 7/8	175	7 1/4	194
86	WF86	635322	†	860	720	100	—	34.5	—	9	229	6 7/8	175	8 1/8	206
101	WF101	635324	†M	810	650	110	—	35.7	—	10 1/4	260	7	179	6 2/3	170
124R	WF124R	635325	†	810	670	110	—	38.0	—	10 1/4	260	6 7/8	175	8 3/8	212
Miata	WF8AMU1R	635136		400	320	45	—	25	—	8 3/8	213	5 1/8	130	7 1/4	184

SYMBOL DEFINITIONS:

* - For height with adapter add 7/8" (22 mm)

† - Maintenance-free calcium alloy grids

~ - Deduct 4% from CCA & CA rating to allow allow for special electrolyte additive

FOOTNOTES:

C - Centerline terminal posts

H - Includes handles or lifting edges

I - Includes top adapter

L - Anchor lock elements

M - Flush manifold vented cover

N - Flush manifold vented cover when shipped wet, standard cover when shipped dry or FP

V - Dual terminal universal design

Ratings conform to B.C.I. specifications.

Dry = up to 10% reduced capacity.

All batteries manufactured in polypropylene cases except where noted.

Maintenance-free batteries have microporous, polyethylene envelope separators.



800-251-7900